





Universal Serial Bus (USB) Cables

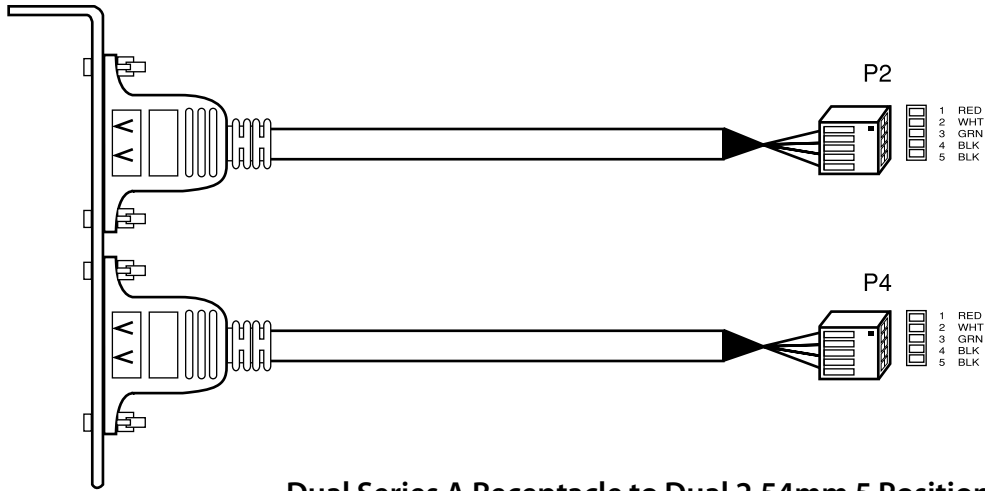


Dual Series A Receptacle to Dual 2.54mm 5 Position Connectors

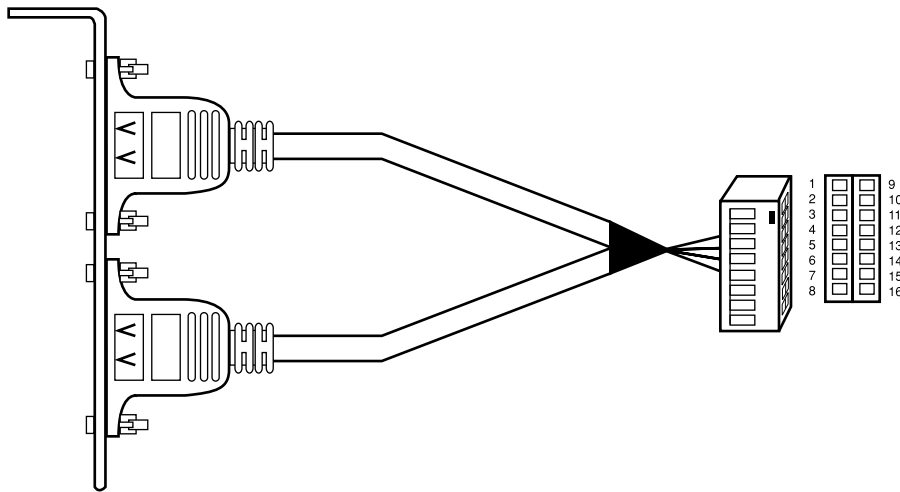

Dual Series A Receptacle to 2.54mm 16 Position Connector

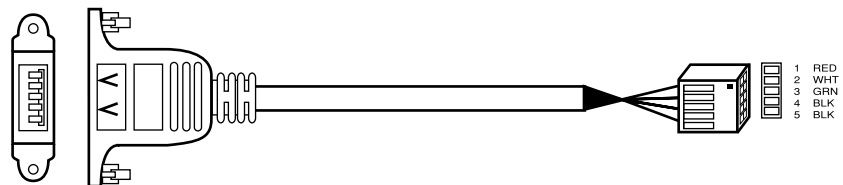


Series A Receptacle to 2.54mm 5 position Connector



Series A Male to Series A Receptacle Extension Cable



USB Cable Technical Specifications

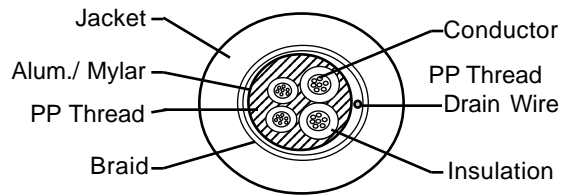

Insulation Material: PP: SR-PVC
Filler: PP thread
Shield: Aluminum Foil/ Mylar - overlap 25% Min. (alum. side out)
Drain wire: 28 AWG (7/36)
Braid: Coverage: 65% (min)
Jacket: PVC Material -0.80
Data Lines: 28 AWG Twisted Pair
Power Pair: 24 AWG

Characteristics:
Voltage Rating: 30 V (rms)
Temperature Rating: 75°C
Signalling: 12 Mbps
Insulation Resistance: PP: DC: 500V 100 MOhm/KM Min @ 20°C
SR-PVC: DV 500 V 10 MOhm/KM Min @ 20°C

USB Connector:

Material:

Terminal: Phosphor Bronze, PB-Ni 30u", Gold 10u"
Shell: Phosphor Bronze, Cu 100u", Tin 200u"
Housing: PBT + G.F., UL 94V-0
Bracket included

Internal 2.54mm Connector:

Material:

Terminal: Phosphor Bronze, PB-Ni 30u", Gold 10u"
Housing: PBT + G.F., UL 94V-0
Color: Black

